

LTC لودسل لودتک

ساخت اسپانیا 

Capacity

10 - 15 - 20 - 25 - 30 - 35 - 40 - 50 t

Compression load cell


Up to 4000 divisions

Fully stainless steel

Fully welded. protected against humidity

IP-69K(DIN40050-9)

With gas dischargeers to protect against atmospheric discharges

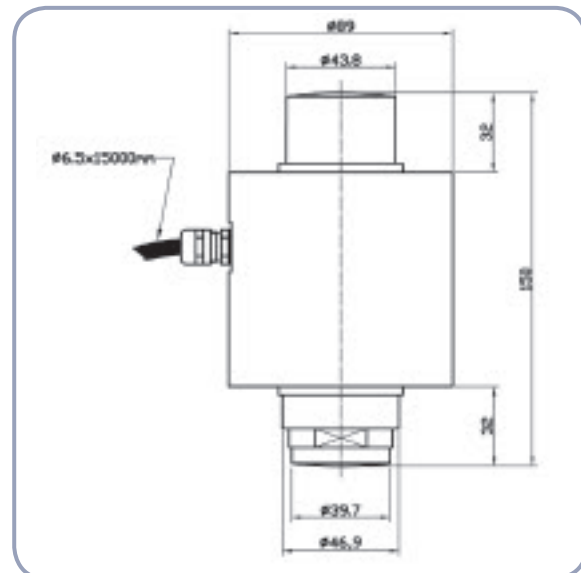

Technical Data

Accuracy class	C3-C4
Rated output	2 ± 0.05% mV/V
Vmin	Emax/14000
Excitation Voltage	5+15 V
Input Resistance	800 ± 3
Output resistance	700 ± 3
Temperature Compensation	-10° C / +40° C
Temperature limits	-30° C / +70° C
Insulation resistance	> 5000 M Ω

Connections Optional Sense

